

200W

准双曲面减速电机

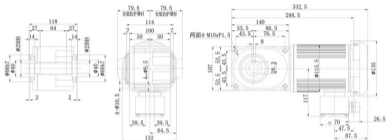



电机性能参数表

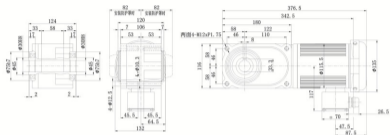
型号	输出功率 W	电压 V	频率 Hz	额定电流 A	额定转矩 N.m	额定转速 rpm	堵转转矩 N.m	堵转电流 A	绝缘等级
三相, 4级	200	200	60	1.1	1.12	1700	2.25	4.93	F
		220	50	1.35	1.36	1400	3.5	5.4	
三相, 4级		380	60	0.78	1.36	1400	3.5	3.1	F
		460	50	0.78	1.12	1740	3.8	3.75	

减速机参数表

功率 W	孔径/轴径 mm	减速比	输出轴转速	输出轴容许转矩	输出轴容许径向力	输出轴容许轴向力
			rpm/50Hz	N.m/50Hz	N	N
200W	φ25/φ22	5	300	5.5	1230	307
		7.5	200	8.3	1370	342
		10	150	11	1520	380
		12.5	120	14	1620	405
		15	100	17	1720	429
		20	75	23	1860	466
		25	60	27	2010	502
		30	50	33	2110	527
	φ30/φ28	40	37.5	44	2300	576
		50	30	55	2450	613
		60	25	67	2550	637
		80	18.8	84	3090	775
		100	15	105	3140	785
		120	12.5	126	3140	785
		160	9.4	169	3140	785
		※200	7.5	184	3140	785
※240	6.3	184	3140	785		

F3C25-5-60-200S(M)
F3C25-5-60-200S3(M)

F3T22-L/R/T5-60-200S(M)
F3T22-L/R/T5-60-200S3(M)


F3C30-80-240-200S(M)
F3C30-80-240-200S3(M)



F3T28-L/R/T80-240-200S(M)
F3T28-L/R/T80-240-200S3(M)

