

400W

准双曲面减速电机




■ 电机性能参数表

型号	输出功率 W	电压 V	频率 Hz	额定电流 A	额定转矩 N.m	额定转速 rpm	堵转转矩 N.m	堵转电流 A	绝缘等级
三相, 4级	400	200	60	1.97	2.31	1650	3.8	7.5	F
		220	50	2	2.75	1380	6.9	9.5	
380		60	1.19	2.75	1380	6.9	5.5	F	
460		50	1.11	2.2	1730	7.3	6.3		


■ 减速机参数表


功率 W	孔径/轴径 mm	减速比	输出轴转速	输出轴许用转矩	输出轴许用径向力	输出轴许用轴向力
			rpm/50Hz	N.m/50Hz	N	N
400W	φ30/φ28	5	300	11	1520	375
		7.5	200	17	1760	438
		10	150	23	1910	475
		12.5	120	27	2060	506
		15	100	33	2160	539
		20	75	44	2400	600
		25	60	55	2550	637
		30	50	67	2650	662
		40	37.5	88	2840	711
	φ35/φ32	50	30	111	2990	747
		60	25	133	3090	767
		80	18.8	169	3480	873
		100	15	211	3530	883
		120	12.5	253	3530	883
		※160	9.4	270	3630	912
		※200	7.5	270	3630	912
		※240	6.3	270	3630	912

F3C30-5-60-400S(M)
F3C30-5-60-400S3(M)

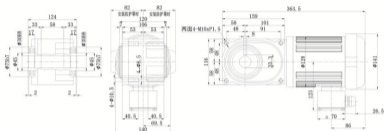

F3T28-L/R/T5-60-400S(M)
F3T28-L/R/T5-60-400S3(M)



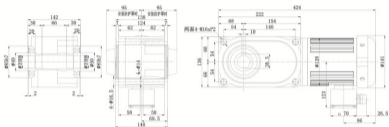F3C35-80-240-400S(M)
F3C35-80-240-400S3(M)

F3T32-L/R/T80-240-400S(M)
F3T32-L/R/T80-240-400S3(M)
