

750W

准双曲面减速电机

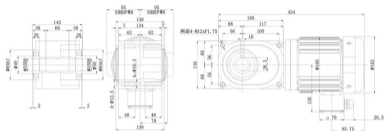


电机性能参数表

| 型号 | 输出功率 W | 电压 V | 频率 Hz | 额定电流 A | 额定转矩 N.m | 额定转速 rpm | 堵转转矩 N.m | 堵转电流 A | 绝缘等级 |
|--------|-----------|---------|----------|-----------|-------------|-------------|-------------|-----------|------|
| 三相, 4极 | 750 | 200 | 60 | 3.45 | 4.22 | 1700 | 9.2 | 10 | F |
| | | 220 | 50 | 4.24 | 5 | 1430 | 15.5 | 12 | |
| 三相, 4极 | | 380 | 60 | 2.45 | 5 | 1430 | 15.5 | 12 | F |
| | | 460 | 50 | 2.28 | 4.12 | 1730 | 16 | 13.2 | |

减速机参数表

| 功率 W | 孔径/轴径 mm | 减速比 | 输出轴转速 | 输出轴容许转矩 | 输出轴容许径向力 | 输出轴容许轴向力 | |
|---------|-------------|------|----------|----------|----------|----------|--|
| | | | rpm\50Hz | N.m\50Hz | N | N | |
| 750W | φ35\φ32 | 5 | 300 | 21 | 1960 | 500 | |
| | | 7.5 | 200 | 31 | 2250 | 567 | |
| | | 10 | 150 | 41 | 2450 | 613 | |
| | | 12.5 | 120 | 52 | 2600 | 669 | |
| | | 15 | 100 | 63 | 2740 | 686 | |
| | | 20 | 75 | 83 | 2990 | 747 | |
| | | 25 | 60 | 104 | 3190 | 796 | |
| | | 30 | 50 | 124 | 3280 | 821 | |
| | | 40 | 37.5 | 166 | 3480 | 870 | |
| | | 50 | 30 | 208 | 3480 | 870 | |
| | φ45\φ40 | 60 | 25 | 249 | 3480 | 870 | |
| | | 80 | 18.8 | 316 | 4750 | 1177 | |
| | | 100 | 15 | 395 | 4750 | 1177 | |
| | | 120 | 12.5 | 473 | 4750 | 1177 | |
| | | ※160 | 9.4 | 554 | 5190 | 1275 | |
| | | ※200 | 7.5 | 554 | 5190 | 1275 | |
| | | ※240 | 6.3 | 554 | 5190 | 1275 | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

F3C35-5-60-750S(M)
F3C35-5-60-750S3(M)

F3T32-L/R/T5-60-750S(M)
F3T32-L/R/T5-60-750S3(M)
